


» Application Story «

CompactPCI in Aerospace

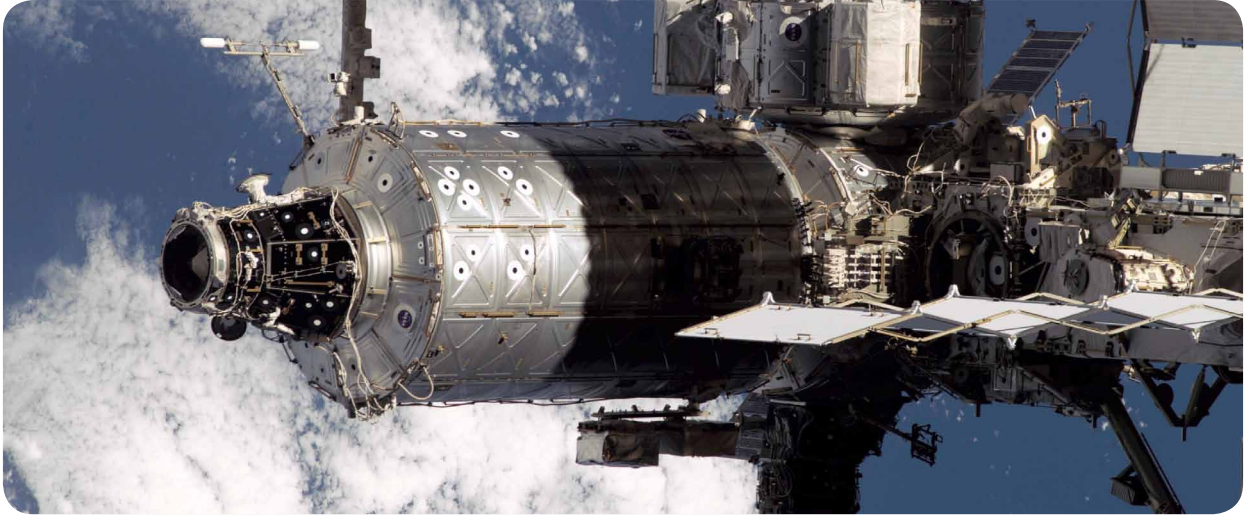

CP303 Computers on the ISS

Up, up, and away with CompactPCI from Kontron



The University of Amsterdam's commercial spin-off, IDEAS! UvA B. V., has developed under the auspices of EADS Space Transportation the temperature control system and two experiment containers for the DECLIC materials research project, which will be conducted onboard the International Space Station (ISS) from 2008. IDEAS! uses a CompactPCI board from Kontron for the temperature control system. The combination of robust design, small size, and Kontron's first-rate customer service tipped the scales in favour of the CP303 board.

As the longest, most complex, and most cooperative space project ever, the International Space Station (ISS) is fascinating. A look behind the scenes reveals the tightly managed everyday life of a research operation that makes full use of the leading edge capacities of this space lab. The interior design of Destiny, the US research module of the ISS, is designed for efficiency: all the control, supply, and research devices are installed as modules in 23 standard racks, which are simple for the crew to operate. Six "EXPRESS racks" are available for research. Truly, EXPRESS stands for quick, meaning "EXpedite the PROcessing of Experiments to the Space Station". These racks hold the experiments in microgravity conditions, in disciplines like physical sciences, life sciences, ecology, geology, space research, and technology which on Earth are prepared in standard bays or laboratory set-ups.

DECLIC – materials research under microgravity


From early 2008, one of these CompactPCI boards part of DECLIC will be in Destiny. DECLIC is dedicated to fluid and material research under microgravity and is a partnership between NASA and the French space agency CNES (Centre National d'Etudes Spatiales). EADS Space Transportation constructed the facility and the first three experiment containers for the various experiments under contract to the two project partners. As "telescience" experiments, the DECLIC processes will be managed by the CNES / CADMOS operation center in Toulouse limiting the ISS crew involvement to hardware set-up and tear down. Two of the DECLIC experiment containers and the subsystem for temperature control were developed and produced by the Amsterdam-based IDEAS! UvA b. v. as subcontractor to EADS Space Transportation. IDEAS! UvA is a spin-off of the University of Amsterdam and is dedicated to the transfer of technology from research to practice. With ALI, the "Alice Like Insert", scientists will study the behavior of near ambient temperature critical fluids (critical meaning here that they demonstrate the properties of liquids and gases at the same time). In the high temperature insert HTI, the chemical behavior of critical water will be studied at a temperature close to 400°C.

Electronics in space: compact, reliable, powerful

The development and production of DECLIC hardware is challenging in at least two ways, an usual situation for space equipment: as many functions as possible must be packed into the smallest possible volume and at the same time, it must operate extremely safely and reliably. It is designed to be used for two years and should work without maintenance by the ISS crew. If a critical component were to fail, the research program could face significant shortcomings, and in the worst case, DECLIC could go unused until the next space shuttle or logistics vehicle brings a replacement – putting at



risk experiments that scientists have been preparing and working on for many years. Therefore, IDEAS! was extremely careful in selecting components, including the "brains" behind the temperature subsystem, which IDEAS! entrusted to the CP303 CompactPCI board from Kontron: it combines the necessary performance characteristics with the expected "space qualities" of compact and robust design. The CP303 – which runs using a socketless low voltage 933 MHz Mobile Pentium III-M processor – manages three tasks:

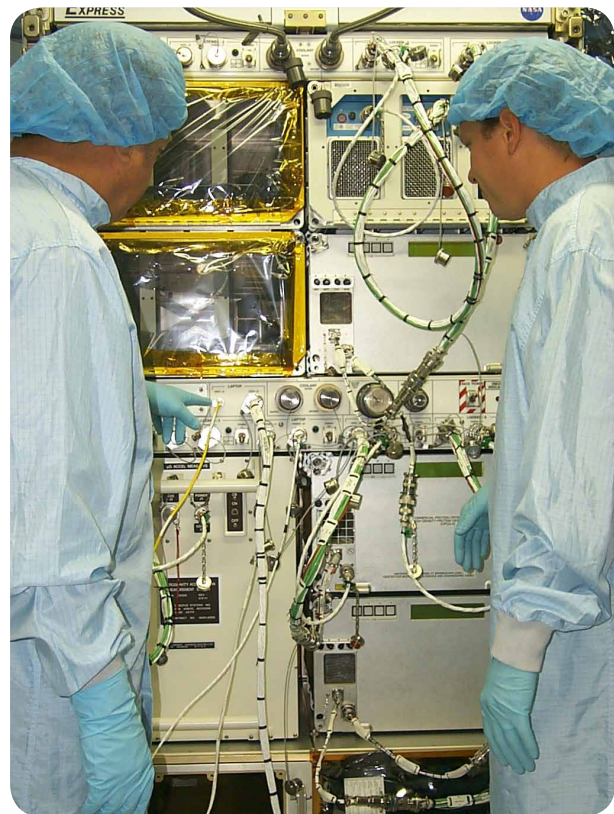


CP303 controls, calculates, and collects

Firstly, it controls the temperature for each of the various experiment containers. Depending on which experiment container is currently installed and operated, a control library and a hardware description, relevant to that experiment, are loaded. Secondly, it operates as the command interface for the scientific scripts which run on the data management computer, also based on a Kontron CompactPCI board. When the data management computer sends a command, it receives an answer and the associated data. Third, it collects the data from the five to eight microcontroller boards on which the specific intelligence for the individual experiment is implemented. The software for these tasks is stored as a boot image on the hard drive of the data management computer and is booted via DHCP. After the initial boot, the application – which is completely housed on a RAM disc – automatically recognizes the current experiment and configures the hardware with automated XML/XSLT scripts.

CP303: robust, fast, and compact

The ability to host the Linux application was the CP303's most obvious advantage. The fast 2.6 Linux kernel has to execute an application that must precisely control the temperature to a few microKelvins in real-time. Furthermore, it was important to IDEAS! that the entire application be executable from a RAM disc and that the system can be booted via Ethernet. CompactPCI, the directly soldered processor and 256 MB RAM make Kontron's CP303 robust enough to handle launch and work in orbit environment without failures. It is also possible to do without failure-prone, moving parts such as fans, because the Pentium III-M creates almost no waste heat despite its high performance level. Beside the combination of performance and robust design, the compact shape of the board – just 100 mm x 160 mm – and the two Ethernet interfaces on the front and rear were important to IDEAS! Not only the boot processes,

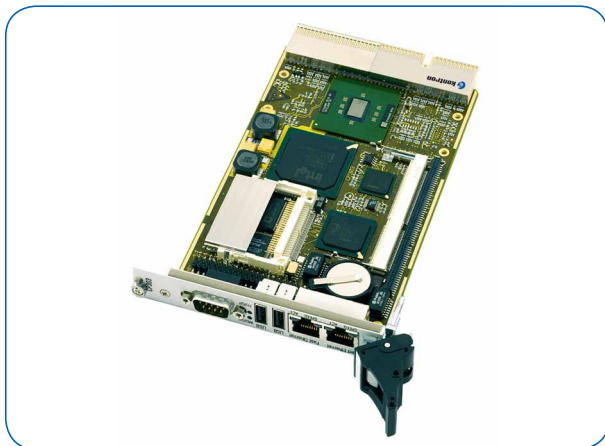

but also the communications between the data management computer and the EXPRESS rack will run via Ethernet. A certain degree of flexibility in equipment was also desired, since some of the board's components – such as the Flashdisk and battery – must be removed in order to best meet NASA's safety requirements.

Praise before launch

DECLIC is not yet in space, but the experiences that IDEAS! has so far had with both the board and Kontron's customer service are consistently positive. Currently, the CP303 is working in the engineering model – a form-fit-and function copy of the flight model, which is missing only the Nusil coating for the electronics – and in two laboratory/ ground models. The front interfaces for the monitor, keyboard, and Ethernet have already proven to be very useful in developing the application and the Linux kernel. "Because of the trouble-free operation of the project, we will certainly use Kontron products in further space activities, when conditions allow it," says Frank Kayzel, project manager with IDEAS!

Key Features CP303

- » Low Voltage Mobile Pentium III-M / microBGA 400MHz up to 933MHz
- » Bis 512 MByte SDRAM, 256MB soldered + ein SODIMM Socket
- » 815 chipset internal oder external AGPx4-VGA
- » Zwei Fast Ethernet Channels
- » Zwei serielle Channels
- » 4HP, 8HP I/O
- » 64-bit CompactPCI interface
- » Optionale I/O-Unterstützung an der Rückseite Compact PCI-Boards der CP300er-Reihe im 3U-Formfaktor gibt es mit einem breiten Prozessorspektrum. Das Spitzenmodell CP307 arbeitet mit einem bis zu 2 GHz schnellen Intel® Core™ Duo.

About Kontron

Kontron designs and manufactures standards-based and custom embedded and communications solutions for OEMs, systems integrators, and application providers in a variety of markets. Kontron engineering and manufacturing facilities, located throughout Europe, Americas, and Asia-Pacific, work together with streamlined global sales and support services to help customers reduce their time-to-market and gain a competitive advantage. Kontron's diverse product portfolio includes: boards and mezzanines, Computer-on-Modules, HMIs and displays, systems, and custom capabilities.

Kontron is a Premier member of the Intel® Embedded and Communications Alliance.

For half-a-decade now, Kontron has been named a VDC *Platinum Embedded Board Vendor*. Based entirely on user feedback, industry professionals evaluate vendors on over 45 non-product related criteria. Kontron is only one of two companies to receive the Platinum award 5-years running.

Kontron is listed on the German TecDAX stock exchange under the symbol „KBC“.

For more information, please visit: www.kontron.com

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1,ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn

